

Vehicle History Report

VEHICLE DETAILS

Chassis number ¹ :	MR31S-846897	Title information ² :	1	Deregistered to Export	0
Manufacture date:	2015-09-25		u _	-	
Make:	SUZUKI	Accident / Repair:	I ⇒	No problem	\checkmark
Model:	HUSTLER	Odometer rollback:		No problem	\bigcirc
Body:	DBA-MR31S	Manufacturer	~		
Grade:	G TURBO	recall:	9	Problem found	×
Engine:	R06A	Safety grade ³ :	8	****	\bigcirc
Drive:	2WD	Contamination			
Transmission:	AT	risk:	<u> </u>	No problem	~

This vehicle does not qualify for Buyback Guarantee

Average Market Price



Unfortunately, this vehicle does not qualify for our Buyback Guarantee program.



About Buyback Guarantee

This CAR VX Vehicle History Report is based only on Information supplied to CAR VX, LTD and available as of 2025-02-25 17:24:28. Other information about this vehicle, including problems, may not have been reported to CAR VX, LTD. Use this report as one important tool, along with a vehicle inspection and test drive, to make a better decision about your next used car.

ACCIDENT / REPAIR HISTORY

Problem type	Reported	Date reported	Data source	Details	Airbag
Collision	Not reported				
Malfunction	Not reported				
Theft	Not reported				
Fire damage	Not reported				
Water damage	Not reported				
Hail damage	Not reported				

ODOMETER READINGS HISTORY

Date reported	Data source	Odometer reading (Km)
2020-10-12	MLIT	42500
2022-09-22	MLIT	66500
2024-12-18	JAA HAA	79900
2025-02-08	USS HAA Kobe	79900

USE HISTORY

Use in the contaminated regions ⁴	Radioactive contamination test fail ⁵	Commercial use
Not reported	Not reported	Not reported

DETAILED HISTORY

Event date	Location	Odometer reading (Km)	Data source	Details
2015-09-25			SUZUKI	Manufactured
2015-10			MLIT	First registration
2020-10-12		42500	MLIT	Inspection
2022-09-22	Kyoto	66500	MLIT	Inspection

2024-12-18	79900	JAA HAA	Auctioned
2025-02-08	79900	USS HAA Kobe	Auctioned
2025-02-21	Kyoto	MLIT	Last registration

MANUFACTURER RECALL HISTORY

Date reported	Data source	Affected part	Details
2019-04-18	MLIT	Other (Other)	There is a possibility that the inspection on the security standards of the road transport vehicle has not been conducted properly because the unqualified inspector (inspection assistant) made a pass / fail judgment, etc. and the acceptance / rejection judgment in the completion inspection process was unclear. is there.

VEHICLE ASSESSMENT⁶

Overall Collision Safety Ratings

	Driver's	seat		Front passer	nger's seat
Points	Evaluation	Goal average	Points	Evaluation	Goal average
8.49	***	71%	10.52	****	88%

* In order to accurately differentiate between the evaluations of different vehicles, a standard is set based on current technology. Up to 6 points out of 12 is given level 1 and the rest of the range is divided up into equal parts, which are respectively assigned to level 2 (more than 6 points but 7.5 or less), level 3 (more than 7.5 points but 9 or less), level 4 (more than 9 points but 10.5 or less) or level 5 (more than 10.5 points).

Braking performance tests ⁷

Dry road	42.2 m
Wet road	45.1 m

VEHICLE SPECIFICATION

1st gear ratio	4.3	2nd gear ratio	2.47
-		_	

3rd gear ratio	1.521	4th gear ratio	1.093
5th gear ratio	0.897	6th gear ratio	
Additional notes		Airbag position, capacity	
Body rear overhang		Body type	LIGHT - RV
Chassis number embossing position		Classification code	17
Cylinders		Displacement	650
Electric engine type		Electric engine maximum output	
Electric engine maximum torque		Electric engine power	
Engine maximum power	52PS(38KW)/6000RPM	Engine maximum torque	64KG*M(630NM)/4000RPM
Engine model	R06A	Frame type	
Front shaft weight	510	Front shock absorber type	MCPHERSON STRUT COIL SPRING
Front stabilizer type		Front tires size	165/60R15 77H
Front tread	1290	Fuel consumption	
Fuel tank equipment	27	Grade	G TURBO
Height	166	Length	339
Main brakes type		Make	SUZUKI
Maximum speed		Minimum ground clearance	
Minimum turning radius	4600	Model	HUSTLER
Model code	DBA-MR31S	Mufflers number	
Rear shaft weight	300	Rear shock absorber type	I.T.L.(ISOLATED TRAILING LINK) TYPE COIL SPRING
Rear stabilizer type		Rear tires size	165/60R15 77H
Rear tread	1290	Reverse ratio	3.272
Riding capacity	4	Side brakes type	
Specification code	17676	Stopping distance	
Transmission type	AT	Weight	750

Wheel alignment	2WD	Wheelbase	2425
Width	147		

AUCTION DATA


Date: 2024-12-18, Auction: JAA HAA, Lot #: 6008

Date:	2024-12-18	Lot #:	6008
Auction name:	JAA HAA	Region:	
Make:	SUZUKI	Model:	HUSTLER
Reg. year:	2015	Mileage (km):	79900
Displacement (cc):	660	Transmission:	AT
Color:	. MARBLE . METALLIC HO .	Model code:	MR31S
Result:	available	Auction grade:	4
Problem type:	No problem	Problem scale:	None
Contaminated:	No	Airbag:	ОК

Date: 2025-02-08, Auction: USS HAA Kobe, Lot #: 65284

Date:	2025-02-08	Lot #:	65284
Auction name:	USS HAA Kobe	Region:	
Make:	SUZUKI	Model:	HUSTLER
Reg. year:	2015	Mileage (km):	79900
Displacement (cc):	660	Transmission:	IA
Color:	BLUE	Model code:	MR31S
Result:	available	Auction grade:	4.5
Problem type:	No problem	Problem scale:	None
Contaminated:	No	Airbag:	ОК

PHOTOS AND AUCTION SHEETS

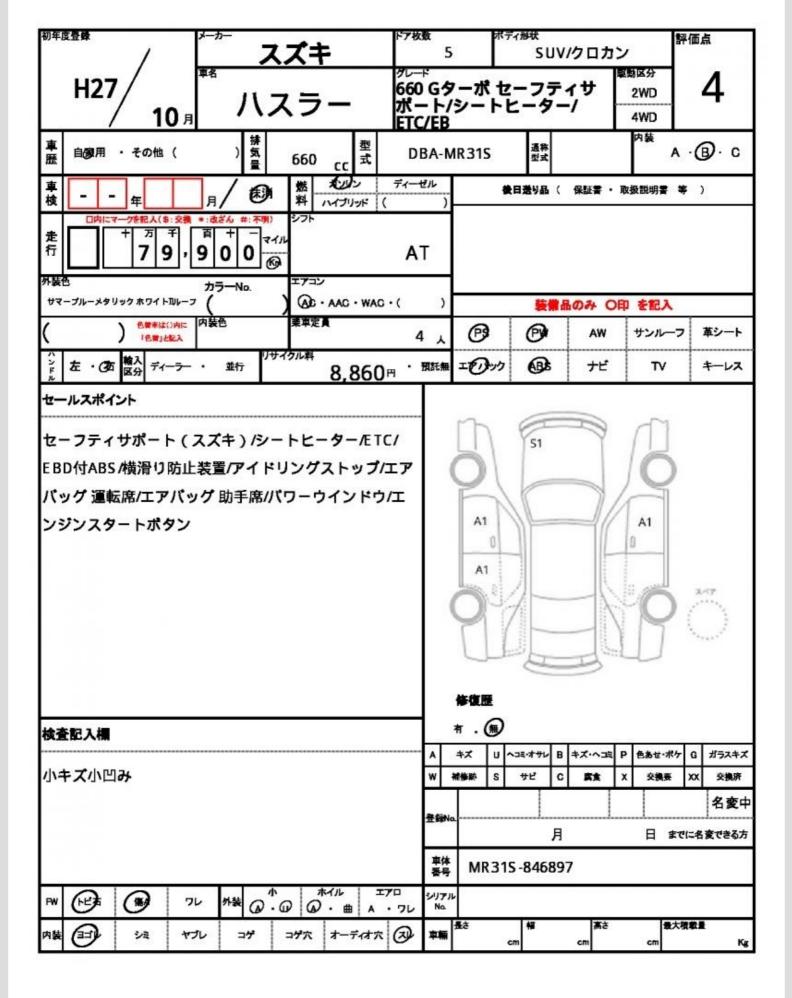



WECARS




■ 単壁 (東東		<u>第2944823</u> 第52章 660		DBA-NR31S		15	AE	
65284	税金量粮年月 H27/10 月	* 8 ^{スズキ} ハスラ		f79g グレー 50	・ド Gターポ	210	4. 3	
単検	年 .	月 日	シフト	IAT	朝 58	HUH TV	11 17	
を行	79,900	kn	治胃	AAC	セールスポイン	21	10 1001	
N 元色 目 ブルー ガソリ	en	87M						
	N 1 E #	ハンドル	重波 (1) 月					
リサイクル	8, 860 19					s - 6		
〇注意事項(調査・不具合調素およりな調明)			单 台 胞	846897				
				5U7N .				

O使意用能告

(荷台内寸)的

シートフチヘタリ ルーム内うす汚れキズ Dミラー色あせ 小キズ小凹

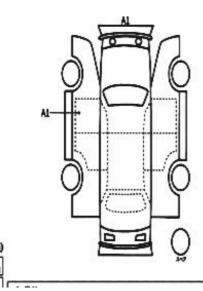

x

×

ce 高さ

(03)

.

¹ Chassis number – a unique identification number of the vehicle in Japan (same as VIN in the USA or Europe)

² Title information:

Registered – qualified for driving in Japan

Deregistered Temporarily – not qualified for driving in Japan, usually a temporary title during the ownership change

Deregistered Completely – not qualified for driving in Japan, the vehicle is determined to be scrapped Deregistered to Export – not qualified for driving in Japan , the vehicle is determined to be exported

³ Determining the overall collision safety performance evaluation – For the driver's seat, the results of the full-wrap frontal collision test, offset frontal collision test, and side collision test are added together and evaluated to 6 different levels. For the Frontal passenger's seat, the results of the full-wrap frontal collision test and the side collision test (results for the driver's or the front passenger's seat are used) are added together and evaluated to 6 different levels.

Regular vehicle inspection – All vehicles in Japan must undergo regular vehicle inspections (shaken). New cars need to be tested after three years, and then vehicles must be tested every two years thereafter. A vehicle inspection (shaken) is compulsory for all vehicles with an engine size over 250cc. It ensures that all vehicles on the road are properly maintained and safe to drive. The test also checks that vehicles have not been illegally modified; if they are found to have been modified, they are not allowed on the road.

⁴ **Use in the contaminated regions** – The Fukushima Daiichi nuclear disaster was a catastrophic failure at the Fukushima I Nuclear Power Plant on 11 March 2011, resulting in a meltdown of three of the plant's six nuclear reactors. As a result, some areas in the following prefectures were contaminated: Fukushima, Miyagi, Ibaraki, Tochigi.

⁵ Radioactive contamination test – radioactive contamination inspection that was started in July 2011 as a preventive measure for exporting contaminated vehicles from Japan. The inspection is being conducted since in all sea ports of Japan under the supervision of The Japan Harbor Transportation Association (JHTA).

MLIT – Ministry of Land, Infrastructure, Transport and Tourism.

⁶ Japan New Car Assessment Program – the Ministry of Land, Infrastructure, Transport and Tourism (MLIT) and the National Agency for Automotive Safety & Victims' Aid (NASVA) have taken measures for safety, one of which is to assess commercially available vehicles through a variety of safety performance tests and release the resulting information compiled into the "New Car Assessment Program". The objective of Japan New Car Assessment Program is to increase the use of safe automobiles by providing an environment in which users can easily select such vehicles. This also promotes the development of safer vehicles by automobile manufacturers. Neck injury protection for rear-end collision performance test , rear seat passenger's protection for frontal collision performance test, rear passenger's seat belt usability evaluation test and seat belt reminder for passengers evaluation test are started in FY2009.

⁷ **Braking Performance Tests** – Braking performance is determined by the shortness of the distance in which a vehicle can stop and the stability of the vehicle at the time of braking. This test is performed under wet and dry road conditions for a vehicle which has both a driver and a front passenger. The distance it takes for the vehicle to stop and the stability of the vehicle at the time of braking is evaluated for when the vehicle is stopped abruptly while traveling at a speed of 100km/h. The stopping distance and vehicle speed have been measured by using GPS since FY2009.

CAR VX, LTD DEPENDS ON ITS SOURCES FOR THE ACCURACY AND RELIABILITY OF ITS INFORMATION. THEREFORE, NO RESPONSIBILITY IS ASSUMED BY CAR VX, LTD OR ITS AGENTS FOR ERRORS OR OMISSIONS IN THIS REPORT. CAR VX, LTD FURTHER EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

© 2014-2025 Car VX Limited. All rights reserved.